

FLO-KWIP

PUDDLESUCKER SUBMERSIBLE PUMP

AL45 & AL75

A leader in submersible pumps, the AL45 & AL75 has become widely known as the benchmark for submersible Puddle Sucker pumps for durability and minimal maintenance.




FEATURES

- ▶ Pumps down to only 3mm!
- ▶ Stainless Steel outer case for low weight and effective cooling
- ▶ Hytrel coated, semi-open impeller and Nitrile rubber volute liner for excellent abrasion resistance
- ▶ Double mechanical seal with SilCarb primary
- ▶ Rubber base
- ▶ Standard with 10m power cable
- ▶ 50mm / 2" MBSP threaded discharge
- ▶ Thermal protection on motor

SPECIFICATIONS

KW	0.45/0.75KW
V:	240V
Hz:	50 Hz
Max Flow:	205L/min/320L/min
Max Head:	11m/17m
Weight:	10.2Kg/14.5Kg & Cable
Height:	347mm/372mm
Diameter:	214mm
FLA:	3A/6.3A
Max Fluid Temp:	40°C
Max Operating Submersible Depth:	10m

PERFORMANCE CURVE

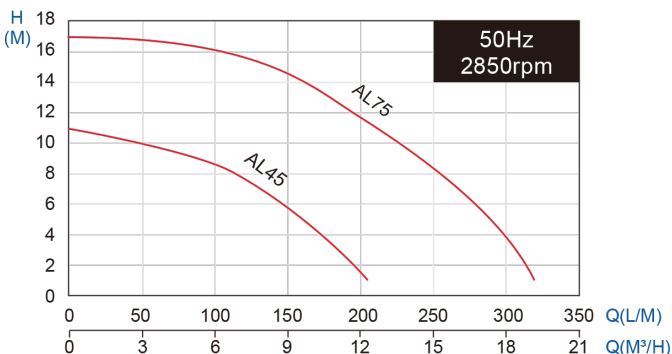

APPLICATIONS

- Hire/Rental
- Basement and cellars
- Contractors
- Construction
- Plumbers
- Concreators



Scan the QR code for more details

**TOOLKWIP PUMPS**
toolkwippumps.com

FOR MORE INFORMATION CONTACT TOOLKWIP PUMPS!

VIC
03 8805 0500

NSW
02 7251 3499

QLD
07 3523 5777

Head Office: 8-10 Parkhurst Drive, Knoxfield, VIC 3180 P 03 8805 0500 E sales@toolkwippumps.com

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE. PHOTOS AND ILLUSTRATIONS DO NOT ALWAYS SHOW STANDARD VERSIONS OF MACHINES. THE ABOVE INFORMATION IS A GENERAL DESCRIPTION ONLY, ALL INFORMATIONS ARE SUPPLIED WITHOUT LIABILITY.