

FLO-KWIP

ELECTRIC SUBMERSIBLE PUMP

LC150

Lightweight contractors submersible pump with bottom discharge, these pumps are designed for dewatering applications with their compact size, light weight and rugged design.




FEATURES

- ▶ E-Coated aluminium outer casing
- ▶ Polyurethane impeller
- ▶ Thermal protection on motor
- ▶ Standard with 10m power cable
- ▶ Double seal arrangement with mechanical seal in oil bath
- ▶ Available with float switch (A) or with-out (M)
- ▶ Bottom Discharge

SPECIFICATIONS

KW	1.5kw
V:	240V
Hz:	50Hz
Rated Current:	13A
Max Flow:	658L/min
Max Head:	21.5m
Weight:	18.1Kg (w/out cable)
Height:	464mm
Width:	313mm

PERFORMANCE CURVE

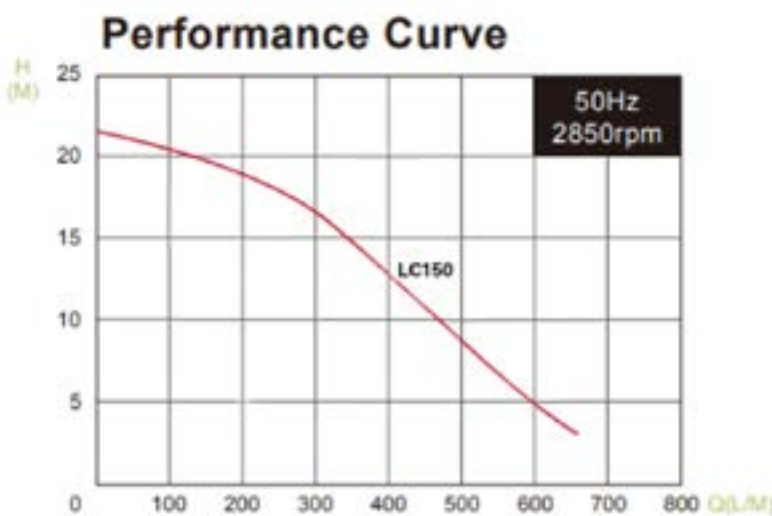

Scan the QR code
for more details