

FLO-KWIP

SUBMERSIBLE PUMP

LC45

Lightweight contrator submersible pump with top discharge designed for dewatering applications with their compact size, lightweight and rugged design.




FEATURES

- ▶ Top discharge and circumferential cooling enables operation in low water levels
- ▶ Stainless steel outer case for low weight and effective cooling, powder coated
- ▶ Hytrel coated, semi-open impeller and nitrile rubber volute liner for excellent abrasion resistance
- ▶ Double mechanical seal with hard-faced sil carb primary for abrasion resistance
- ▶ Standard with 10m power cable
- ▶ Available Auto with float switch, or Manual versions
- ▶ Thermal protection on motor
- ▶ Powder coated steel strainer

SPECIFICATIONS

KW	0.37KW
V:	240V
Hz:	50 Hz
Max Flow:	232L/min
Max Head:	11.4m
Weight:	11.5Kg & Cable
Height (with float down):	345mm
Diameter:	184mm
FLA:	3A
Protector:	Auto-cut
Discharge:	50MM/2"MBSP
Max Fluid Temp:	40°C
Max Operating Submersible Depth:	10m

PERFORMANCE CURVE

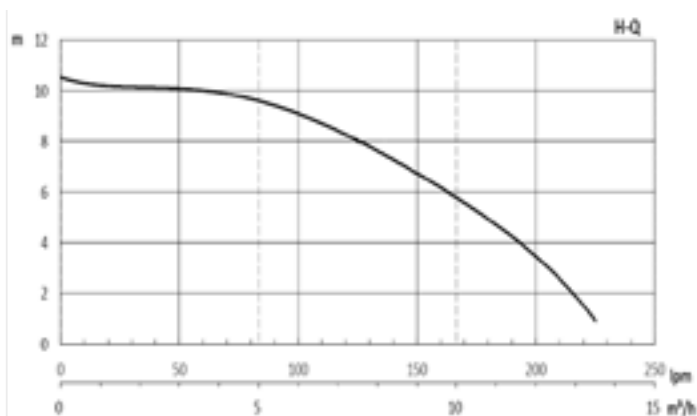

APPLICATIONS

- Hire/Rental
- Municipal/Utilities
- Contractors
- Construction
- Plumbers
- Concretors
- Cellars & Basements



Scan the QR code for more details