

FLO-KWIP

SUBMERSIBLE PUMP

LC50

Lightweight contractors submersible pump with bottom discharge, these pumps are designed for dewatering applications with their compact size, light weight and rugged design.


TECHNICAL SPECIFICATIONS

Kw:	0.37
V:	240v
Hz:	50Hz
Rated Current:	3A
Max Flow:	240l/min
Max Head:	12m
Height:	352mm
Width:	243mm
Weight	11.3kg (W/out cable)

FEATURES

These pumps are designed for dewatering applications with small suspended particles and dirty water.

- ▶ Aluminium motor casing
- ▶ Cast Iron Pump casing
- ▶ Hytrel coated steel impeller
- ▶ Double mechanical seal in oil bath
- ▶ Hard-faced lower seal
- ▶ Available with float switch (A) or without (M)
- ▶ Built-in agitator

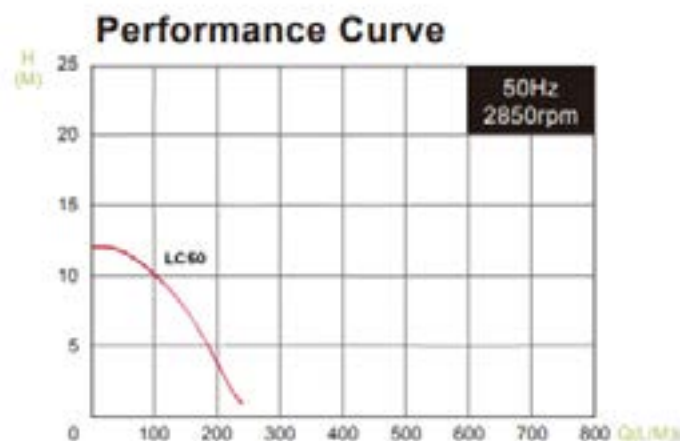

Scan the QR code
for more details