

FLO-KWIP

SUBMERSIBLE PUMP

LC75

Lightweight contractors submersible pump with bottom discharge, these pumps are designed for dewatering applications with their compact size, light weight and rugged design.


TECHNICAL SPECIFICATIONS

Kw	0.75
V:	240V
Hz:	50Hz
Max Flow:	375l/min
Max Head:	18m
Weight:	13.9kg w/out cable
Height:	377mm
Width:	279mm

FEATURES

These pumps are designed for dewatering applications with small suspended particles and dirty water.

- ▶ Aluminium motor casing
- ▶ Cast Iron Pump casing
- ▶ Hytrel coated steel impeller
- ▶ Double mechanical seal in oil bath
- ▶ Hard-faced lower seal
- ▶ Available with float switch (A) or without (M)
- ▶ Built-in agitator

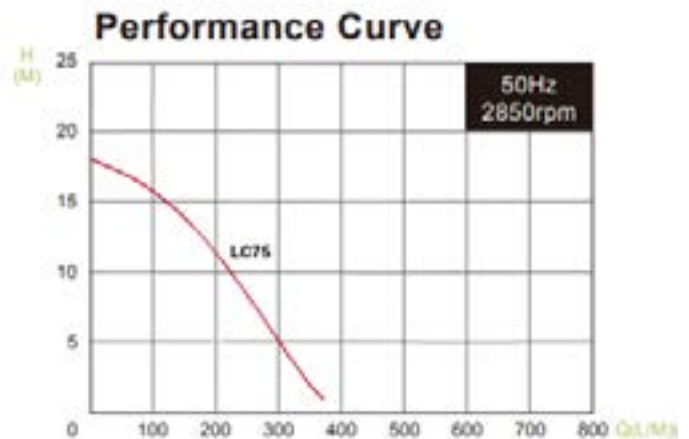

Scan the QR code
for more details