

# FLO-KWIP

## S75A Data Sheet

### SUBMERSIBLE SLUDGE PUMP

*Abrasion resistant, and Light weight for portability*


#### APPLICATIONS

- Construction/contractors - portable site pump
- Concrete Plants, Municipal, Utilities, Tunnelling

#### FEATURES


Specifically designed for dewatering applications with dirty water and sludge.

- 304 stainless steel outer casing
- Hytrel coated steel impeller
- Hytrel pump base
- NBR volute liner
- Built-in air vent for cooling
- Double mechanical seal in oil bath
- Hard-faced lower seal
- Will handle solids up to 38mm diameter

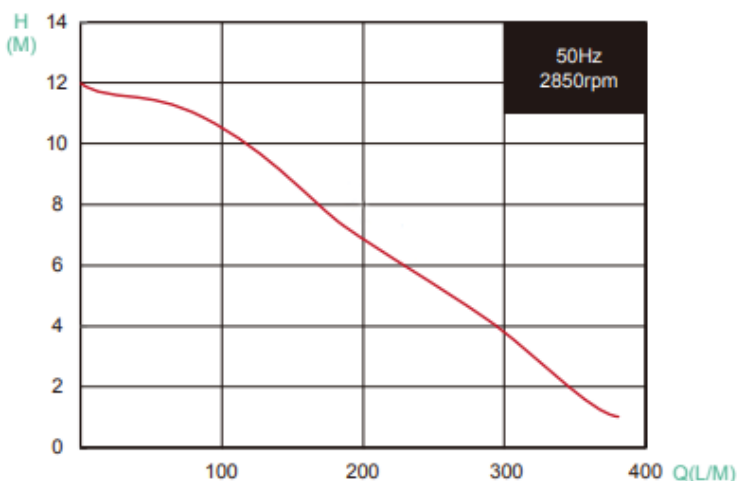

#### SPECIFICATIONS

<b>KW:</b>	0.75
<b>V:</b>	240V
<b>Hz:</b>	50Hz
<b>Max Flow:</b>	380L/min
<b>Max Head:</b>	11.7m
<b>Max Solids:</b>	38mm diameter
<b>Height:</b>	475mm
<b>Width:</b>	270mm
<b>Weight:</b>	13.7kg
<b>Rated Current:</b>	5.6A

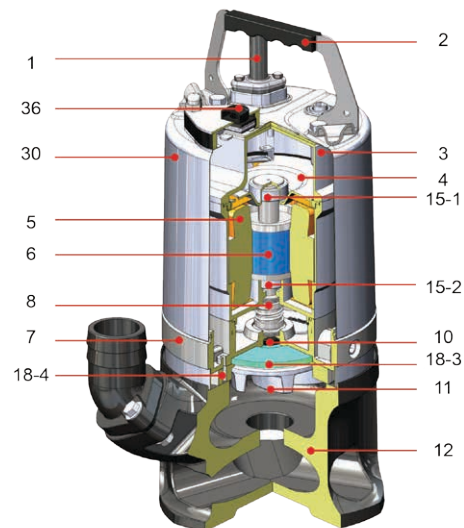

\*Specifications subject to change without notice

For more information contact Toolkwip Pumps!

P: +61 3 8805 0500

F: +61 3 9801 0299

E: sales@toolkwippumps.com

www.toolkwippumps.com

 **TOOLKWIP  
PUMPS**