

FLO-KWIP

LC160 DATA SHEET

LIGHTWEIGHT CONTRACTOR SUBMERSIBLE PUMP.
with Top Discharge



FEATURES


Compact, lightweight, submersible pump for rental, contractors, councils and builders.

- ▶ Top discharge and circumferential cooling enables operation in low water levels
- ▶ Stainless steel outer case for low weight and effective cooling, powder coated
- ▶ Hytrel coated, semi-open impeller and nitrile rubber volute liner for excellent abrasion resistance
- ▶ Double mechanical seal with hard-faced silcarb primary for abrasion resistance
- ▶ Standard with 10m power cable
- ▶ Available Auto with float switch, or Manual versions
- ▶ Thermal protection on motor
- ▶ Powder coated steel strainer

TECHNICAL SPECIFICATIONS

KW	1.5KW
V	240V
Hz	50Hz
Max. Flow	470L/min
Max. Head	19.5m
Weight (w/o cable)	25 Kg
Height (with float down)	474mm
Diameter	225mm
FLA	12A
Protector	Auto-cut
Max. Fluid Temp	40°C
Max. Operating subm. Depth	10m
Discharge	50mm/2" MBSP Threaded

PERFORMANCE CURVE

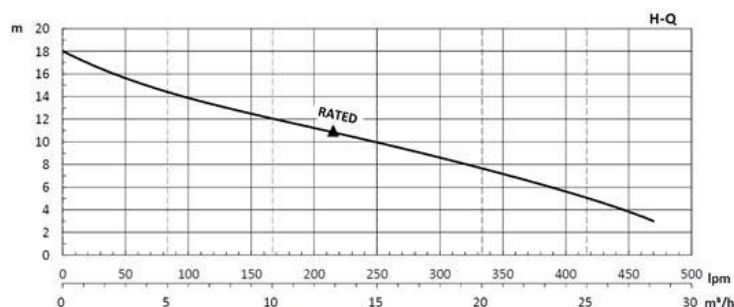

APPLICATIONS

- ▶ Hire/Rental
- ▶ Municipal/Utilities
- ▶ Contractors
- ▶ Construction
- ▶ Plumbers
- ▶ Concreters
- ▶ Cellars and Basements



P: 03 8805 0500

HEAD OFFICE:
8-10 Parkhurst Drive
Knoxfield VIC 3180

E: sales@toolkwippumps.com

NSW BRANCH:
184 Newton Road
Wetherill Park NSW 2154

www.toolkwippumps.com

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE. PHOTOS AND ILLUSTRATIONS DO NOT ALWAYS SHOW STANDARD VERSIONS OF MACHINES.
THE ABOVE INFORMATION IS A GENERAL DESCRIPTION ONLY, ALL INFORMATIONS ARE SUPPLIED WITHOUT LIABILITY.