

FLO-KWIP

SSL-35


'PUDDLE SUCKER' - *Drains down to only 2mm!!*

LIGHTWEIGHT, STAINLESS STEEL, LOW LEVEL, SUBMERSIBLE PUMP



- » Weighs only 4kg plus cable!
- » With float switch for **Auto operation**, or **Manual operation** with float switch in holder to pump down to lowest level
- » 'Electroplater's favourite' for pumping out of rinse tanks etc.
- » Casing in stainless steel, Noryl impeller
- » Complete with 10m cable with plug
- » Protection IP68
- » Insulation Class F
- » Maximum temperature of the pumped liquid 35°C; pH: 6 - 10; max density 1000kg/m³
- » Maximum submersion depth: 5m
- » Not suitable for pumping solids or chemicals
- » Made in Europe

MATERIALS OF CONSTRUCTION			
External Case	Stainless Steel AISI304	Strainer	Stainless steel AISI304
Motor Case	Stainless Steel AISI304	Motor Shaft	Stainless steel AISI304
Elastomers	NBR	Handle	Polypropylene
Seal	Ceramic/Graphite /NBR	Impeller	Noryl

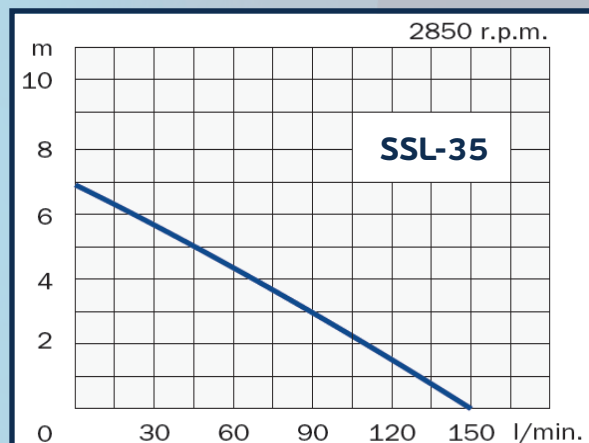

MODEL	POWER		Voltage	A	Head						
	HP	kW			1	2	3	4	5	6	7
SSL-35A	0.5	0.37	230/50/1	1.5	Capacity						
					130	110	88	68	45	21	2



8 - 10 Parkhurst Drive
Knoxfield, Victoria 3180

PH: 03 8805 0500
E: sales@toolkwippumps.com
W: toolkwippumps.com

Specifications subject to change without notice. Subject to Toolkwip Pumps Conditions of Sale.

©Copyright 2018, Toolkwip Pumps Pty Ltd.